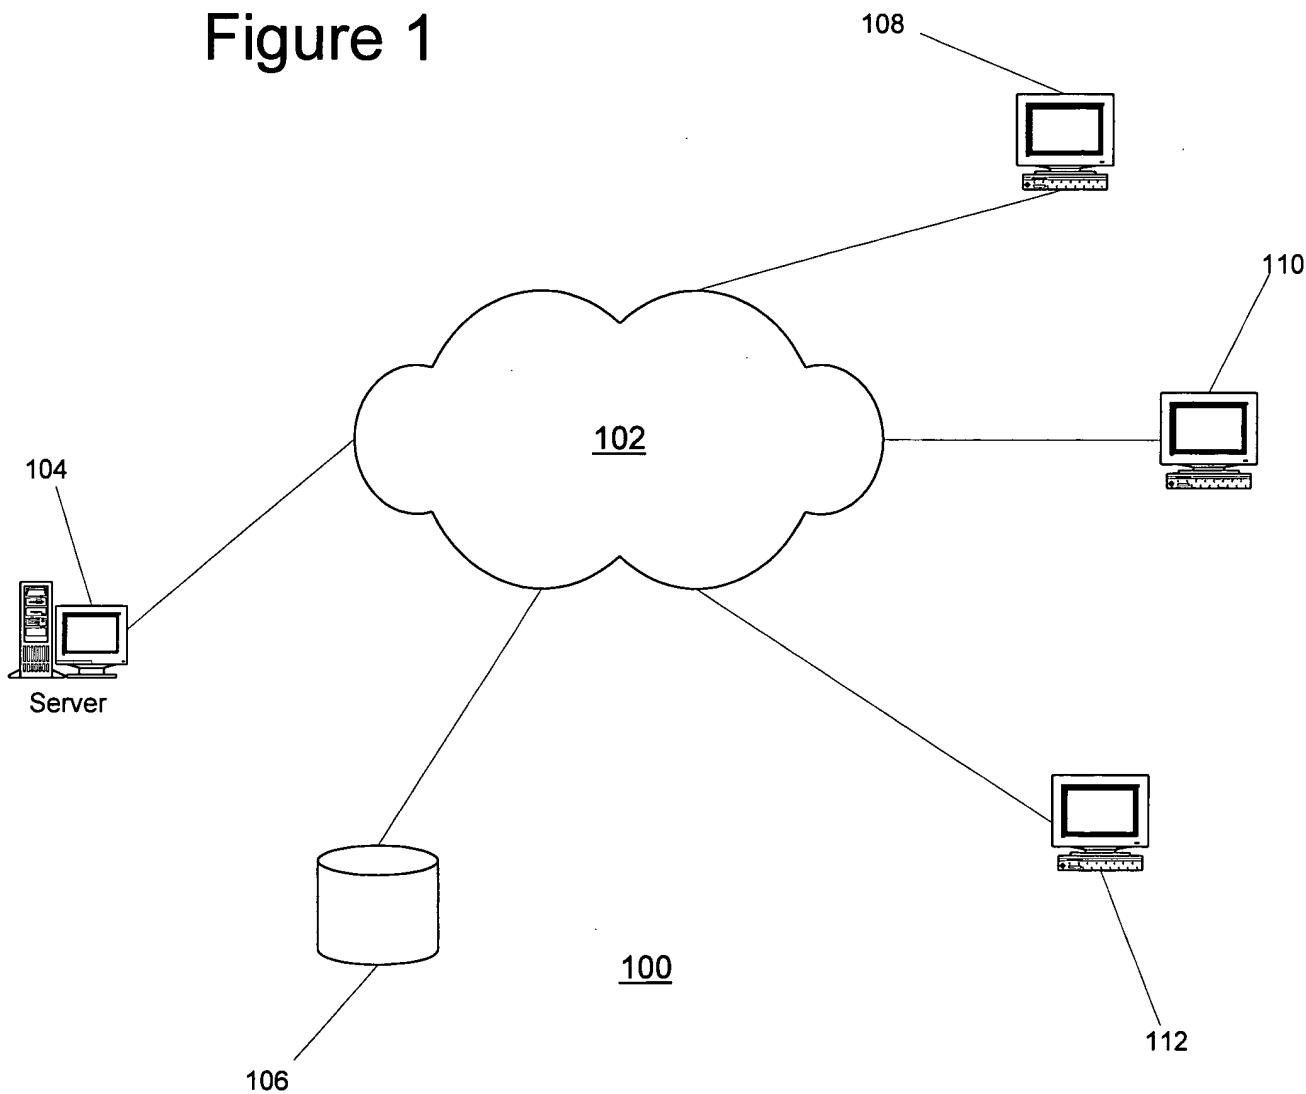


Figure 1



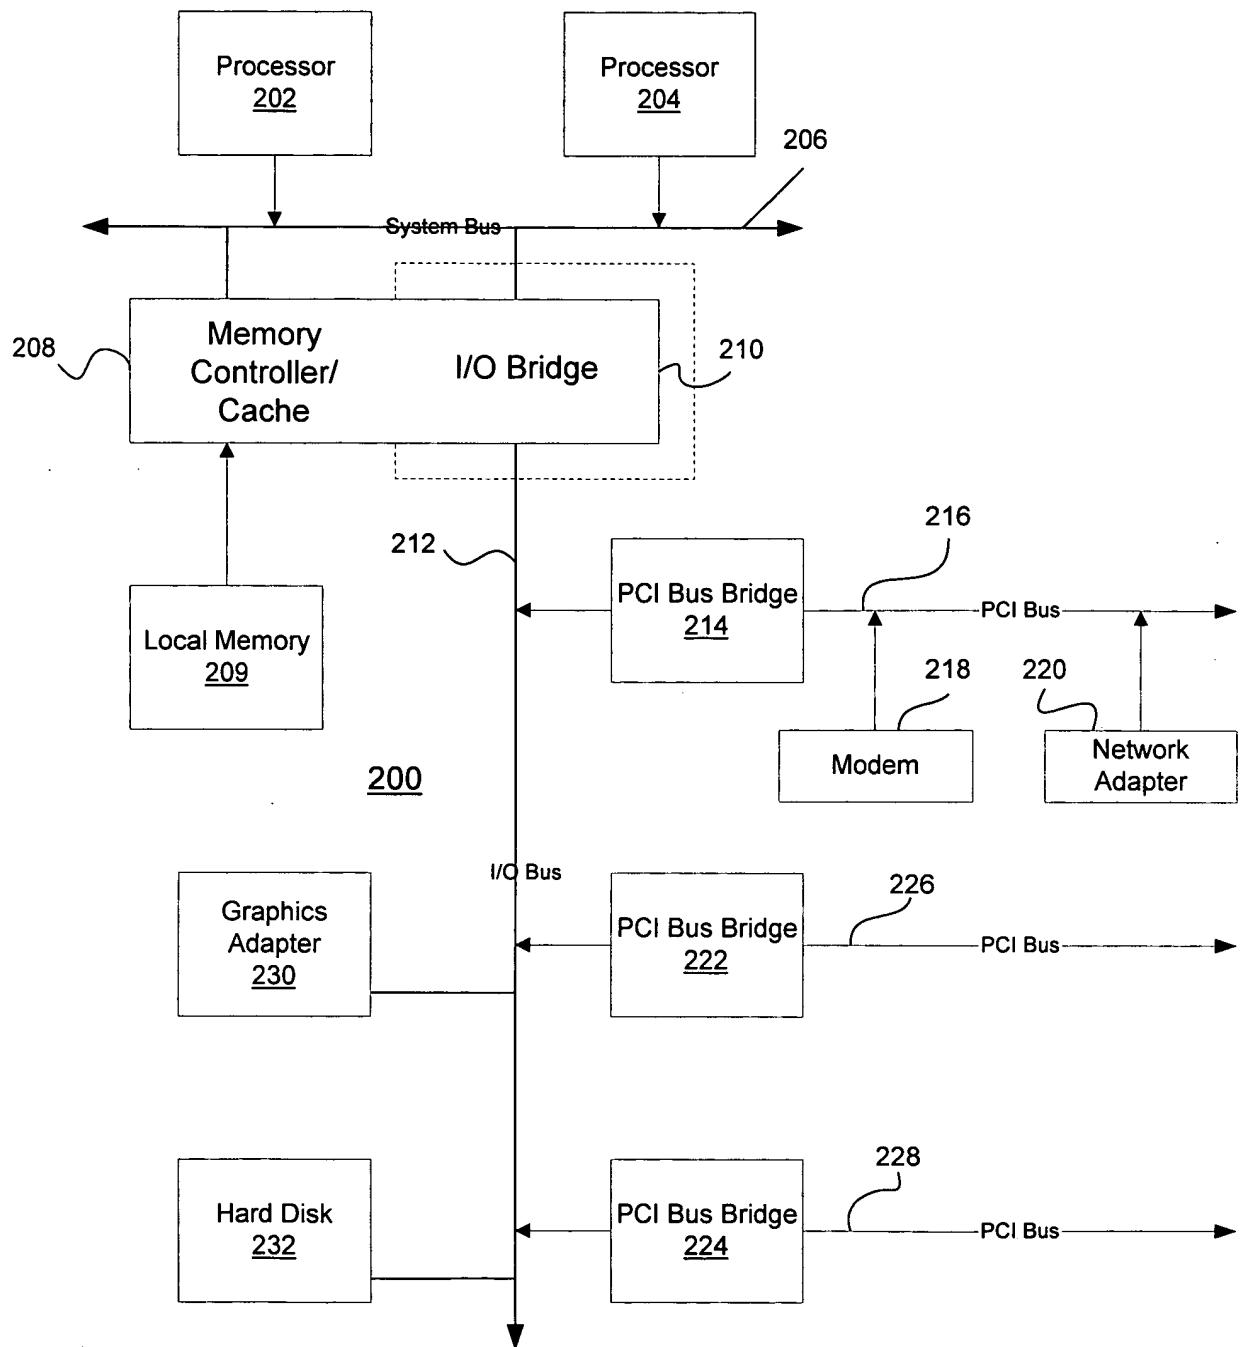


Figure 2

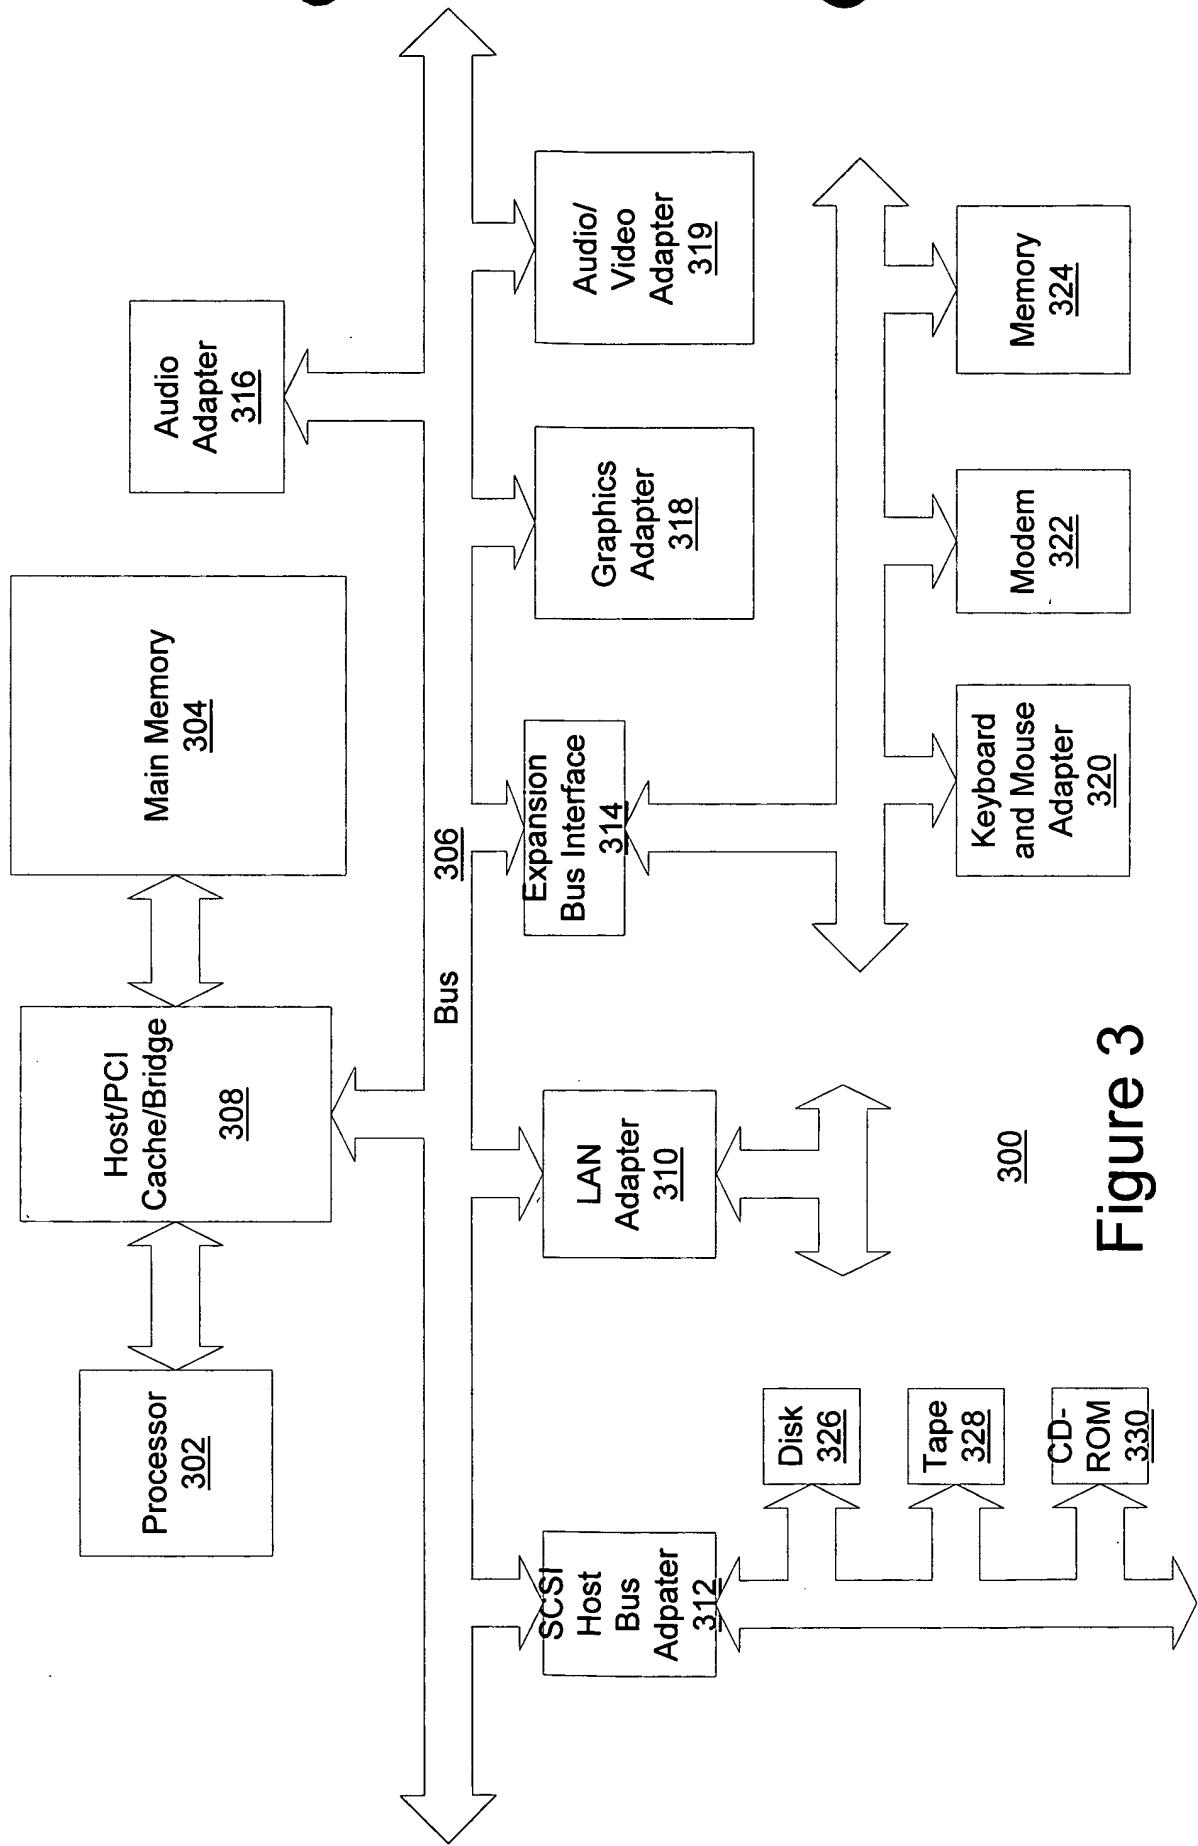


Figure 3

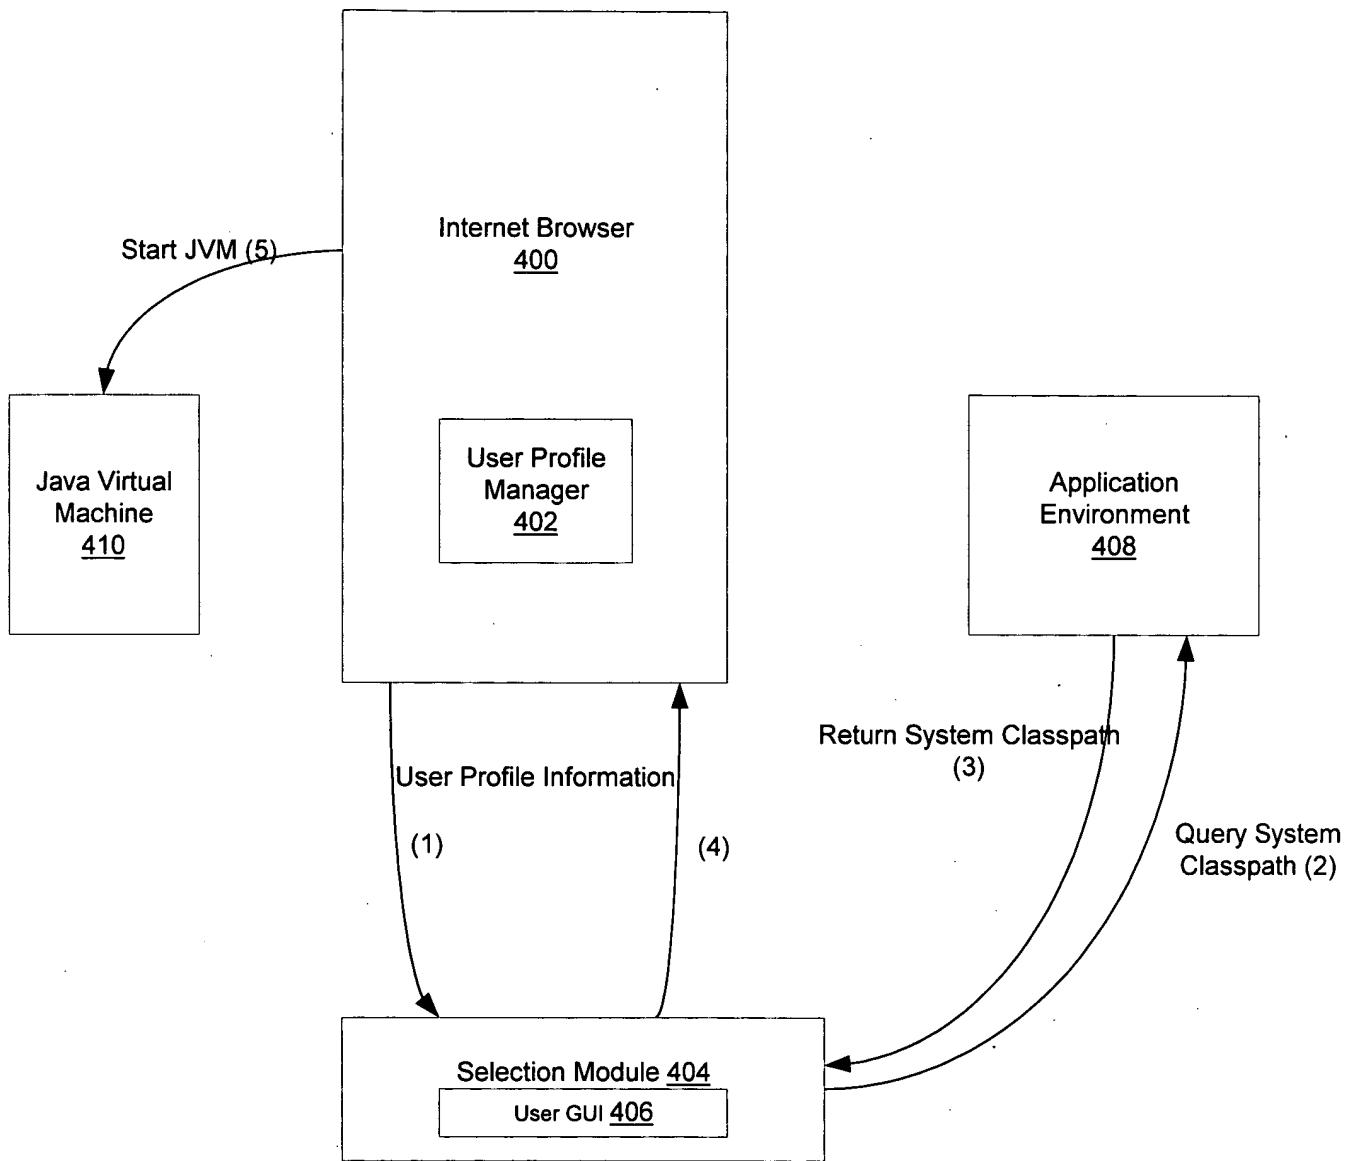
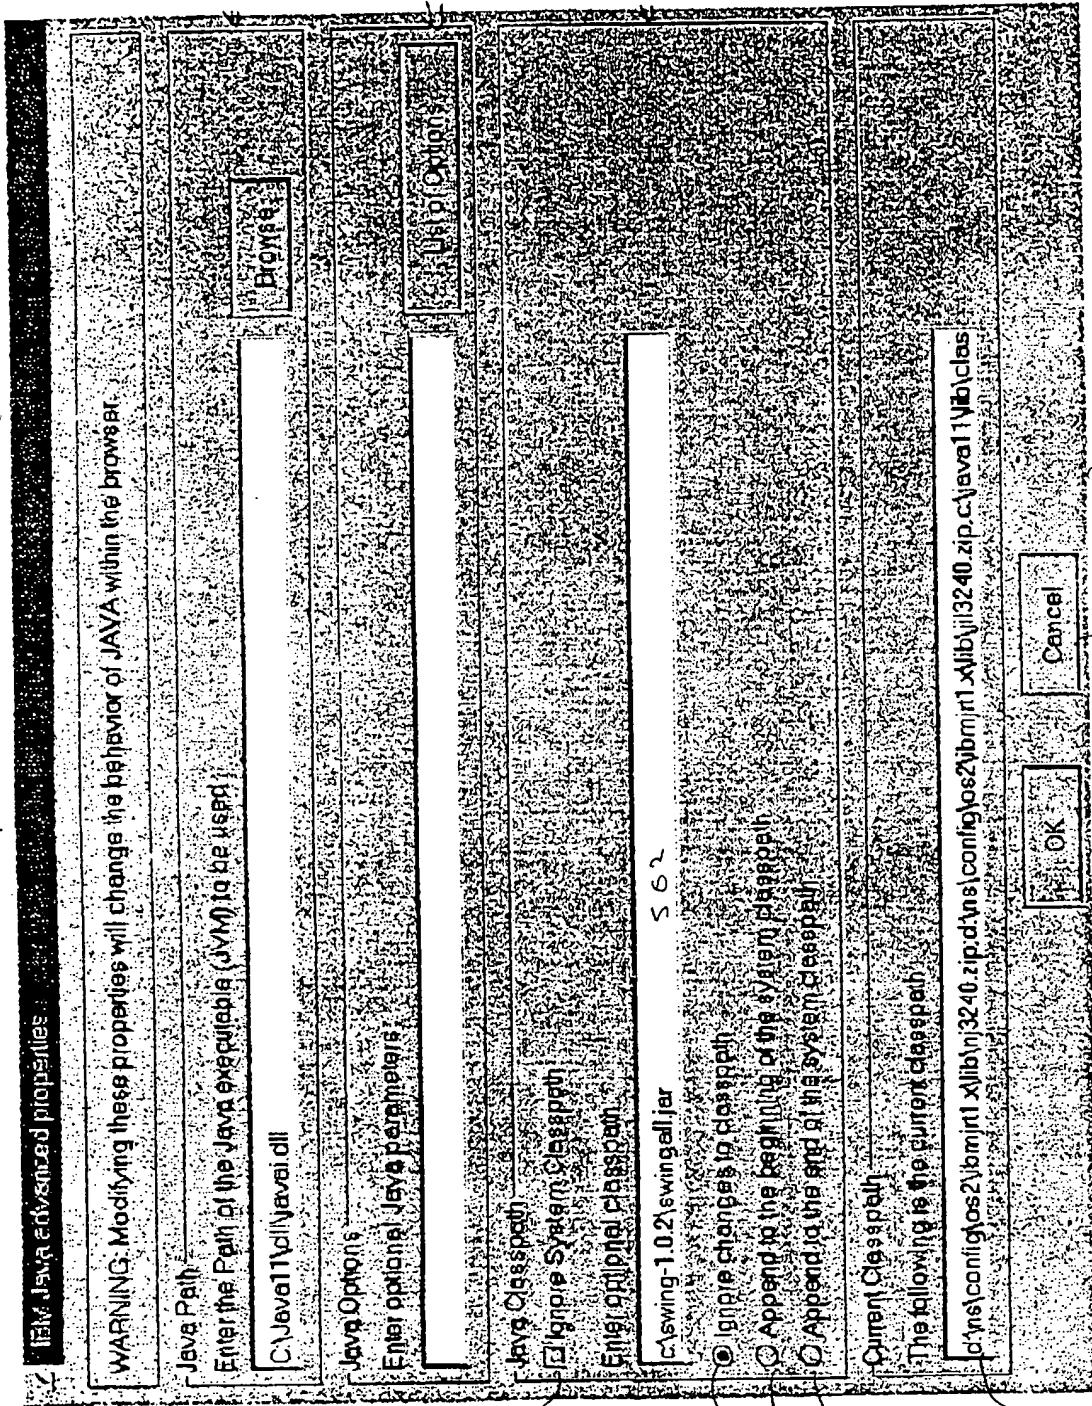


Figure 4

2016-07-09 23:21:00

FIGURE 5



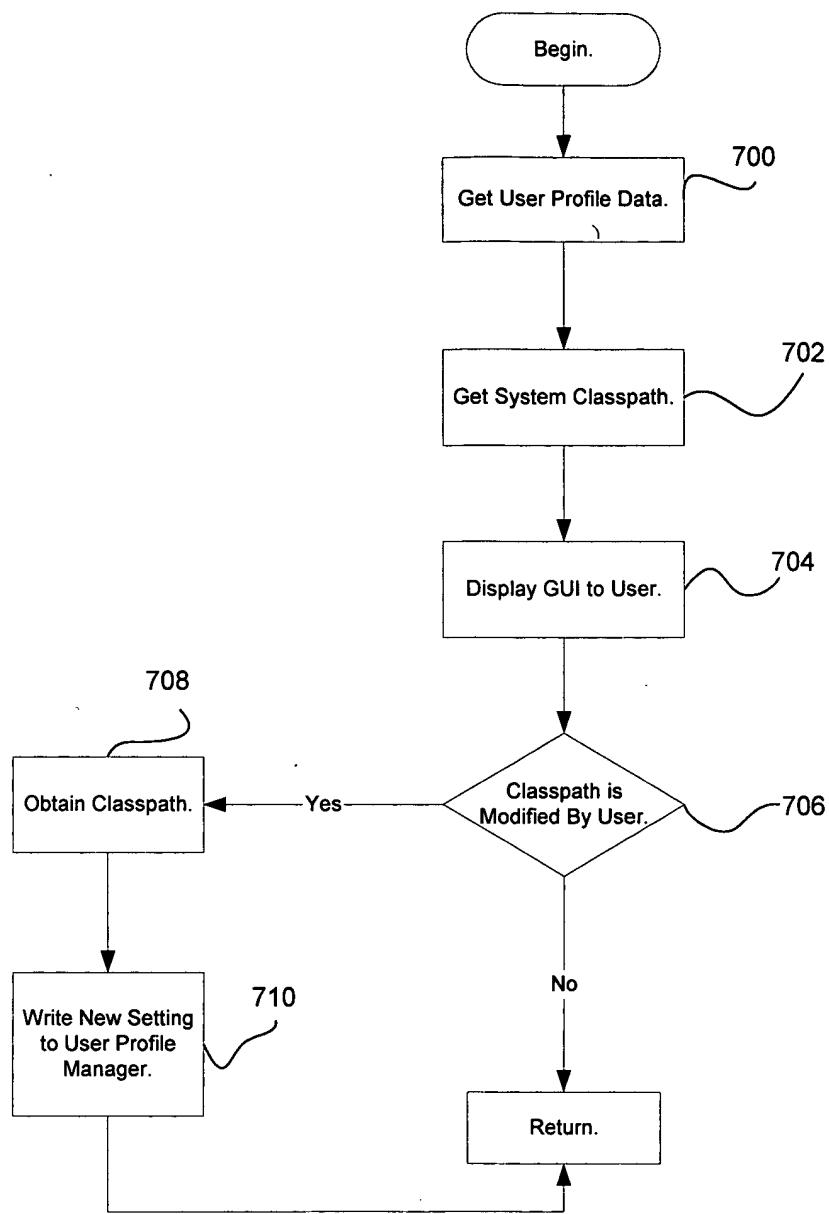


Figure 7

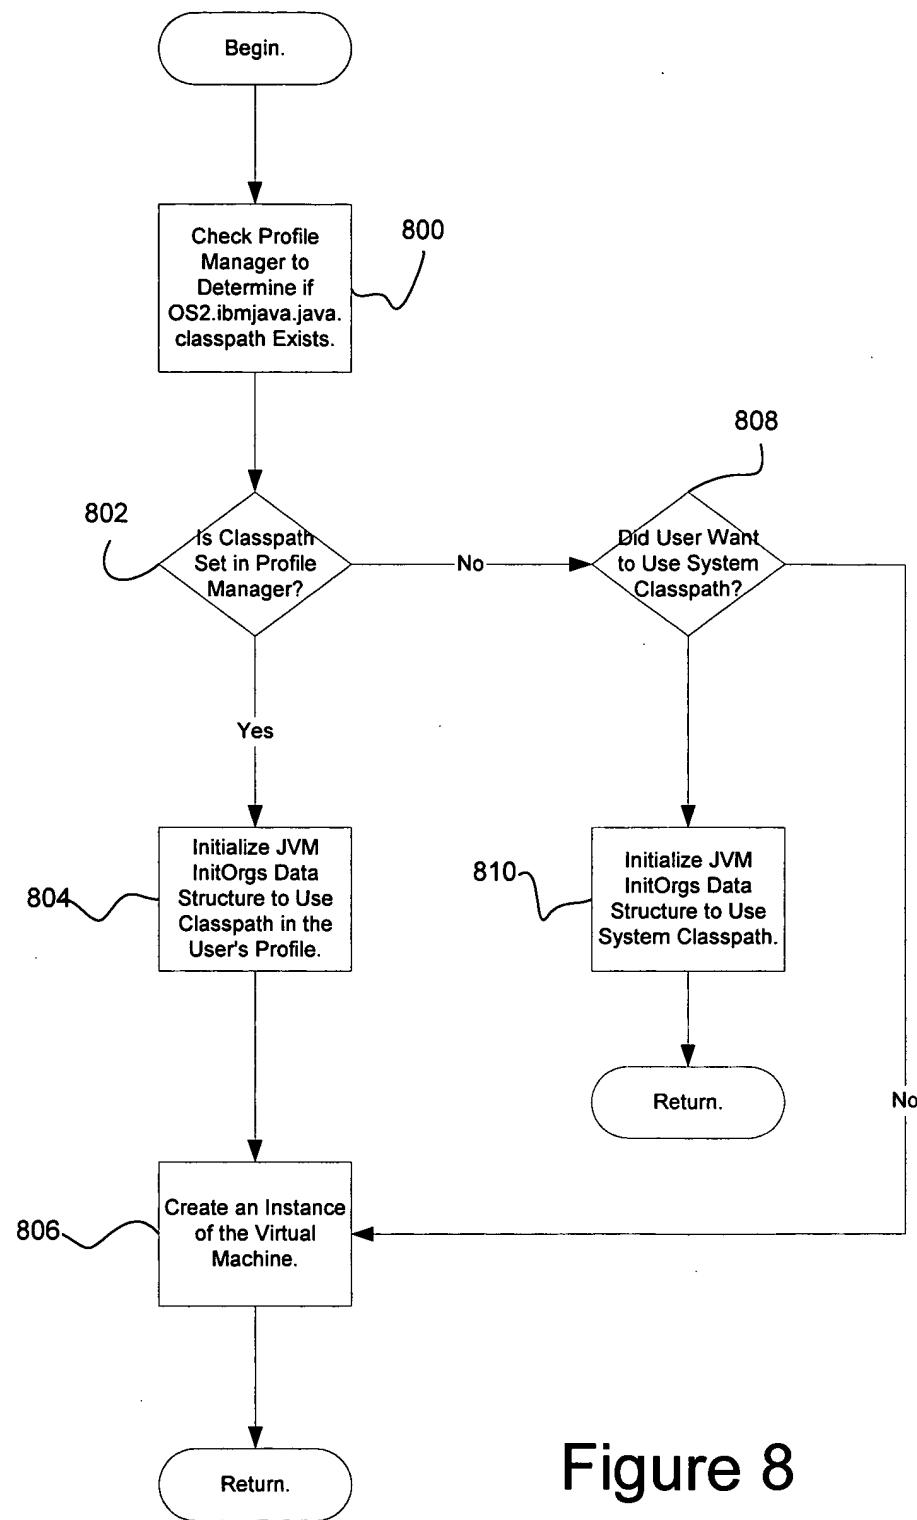


Figure 8

JVM Initialization Data Structure

JDK1_1InitArgs Fields

Field Name	Java Flag	Description
nativeStackSize	-ss	Max Stack Size for native threads
javaStackSize	-oss	Max Stack for any JVM thread
minHeapSize	-ms	Initial heap size
maxHeapSize	-mx	Maximum heap size
verifyMode=0	-noverify	Do not verify byte code when loading
verifyMode=1	-verifyremote	Verify byte code only when loading remotely
verifyMode=2	-verify	Verify loading of all byte code
classpath	-classpath	Local directories for loading classes
enableClassGC	-noclassgc	Enable/disable class garbage collection
enableVerboseGC	-verbosegc	Enable reporting of garbage collection
disableAsyncGC	-noasyncgc	Disable asynchronous garbage collection
verbose	-verbose of -v	Reports JVM information, including all class loads
debugging	-debug	Allow remote debugging of JVM

Figure 9

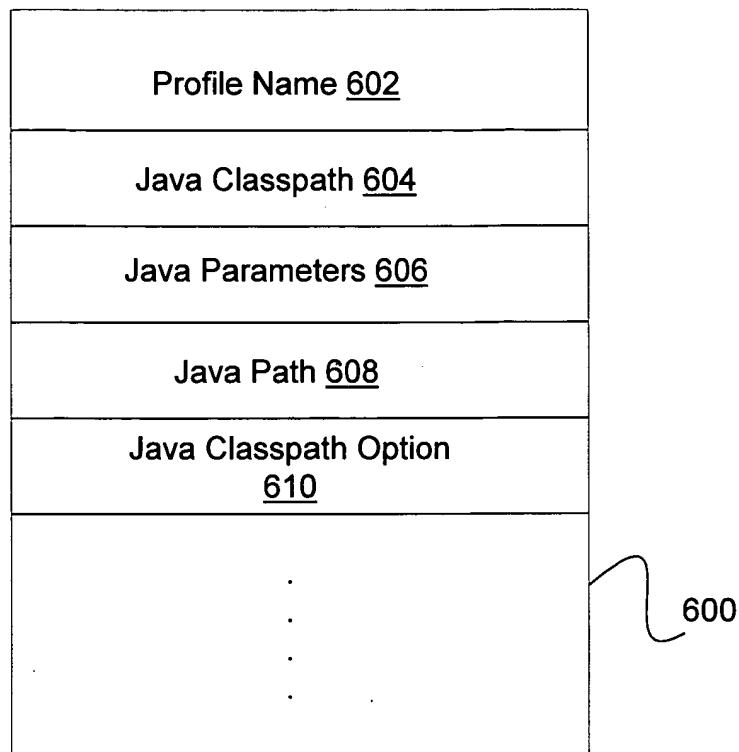


Figure 6